



FLOWSIC100 Volume Flow Measuring Device

Gas Flow Measurement for
Continuous Emission Monitoring

FLWSIC100 – The reliable and precise flow measurement with the highest durability

FIELDS OF APPLICATION

- Power generation (e. g. power plants)
- Processing industries (cement manufacturing, steel and iron production)
- Waste disposal industry (e. g. waste incineration plants)
- Chemical industry
- Petrochemical plants and refineries
- Pulp, paper and textile industry
- Ventilation and heating plants

FLWSIC100 H

- High power version for large stacks up to 13 m diameters
- Certified according to 2001/80/EC, 2000/76/EC, 27th BImSchV¹⁾, TA air, MCERTS and GOST
- Suitable for high dust application

FLWSIC100 M

- Medium power version – best suitable for stack diameters up to 3.4 m
- Certified according to 2001/80/EC, 2000/76/EC, 27th BImSchV¹⁾, TA air, MCERTS and GOST

FLWSIC100 PR

- For stack diameters greater than 0.4 m
- Certified according to 2001/80/EC, 2000/76/EC, 27th BImSchV¹⁾, TA air, MCERTS and GOST
- Probe type with two transducers for the installation from one side only

¹⁾ Federal Immission Control Ordinance


AT A GLANCE

- Rugged titanium transducers (standard) for higher durability, also in wet gas conditions
- Corrosion resistant probe materials for use with aggressive gases
- No purge air required
- Standard system can be used for gas temperatures up to 260 °C; with the innovative internal cooling up to 450 °C max.²⁾
- Various probe lengths to meet a wide range of application conditions
- Integral measurement over the entire stack diameter³⁾ for representative measuring results
- No moving parts means low maintenance
- Fully automatic zero and span check

²⁾ Temperature specifications for the specific types see tech. data, page 4

³⁾ Except for the probe type



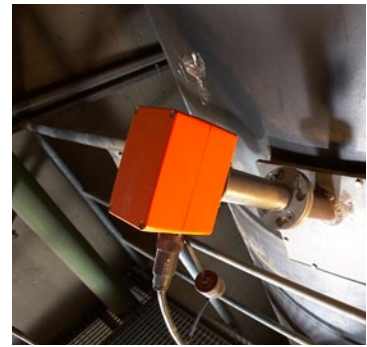

PRODUCT DESCRIPTION


The FLOWSIC100 standard version contains two FLSE100 sender/receiver units, a MCU control unit and a connection box. The MCU is used for input and output of signals, for calculation of volume flow to reference conditions (standardization) as well as for user friendly LCD interface.

Installation of the sender/receiver units

- **Cross-stack installation:**
2 sender/receiver units are mounted on both sides of a stack at a specific angle α to the gas flow direction.
- **One-side installation:**
Only a single sender/receiver unit (probe type) is mounted at a specific angle α to the gas flow. Both ultrasonic transducers are installed on the probe with a fixed measuring path.


Optional components

- MCU control unit with integrated blower unit (for internal cooled types only)
- Interconnection of an additional measuring path (2 path measurement) or dust measurements in one control unit possible

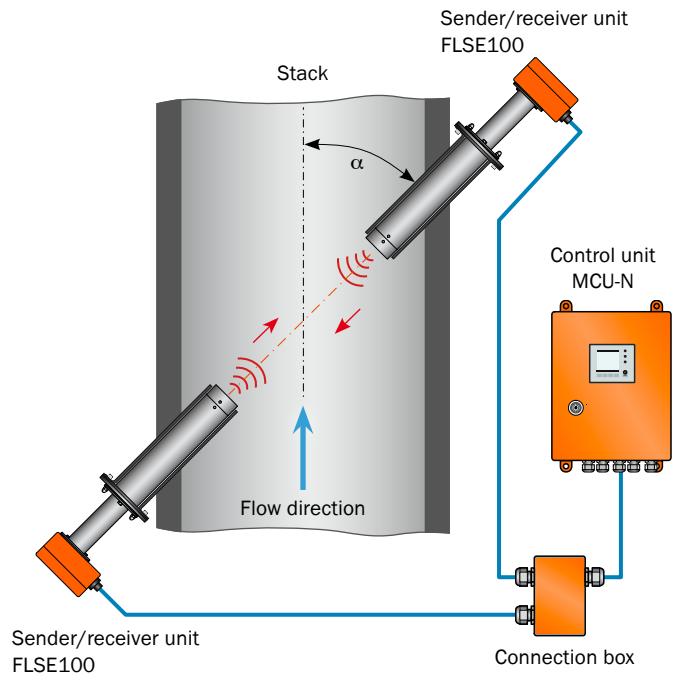

INNOVATIVE INTERNAL COOLING (AC-TYPES)

The internal cooled types FLOWSIC100 M-AC and H-AC operate at gas temperatures up to 450 °C. The necessary cooling of the transducers is realized by using an integrated air cooling supply. The cooling is made internally in the ultrasonic transducer. Cooling air does not contact the measured medium.

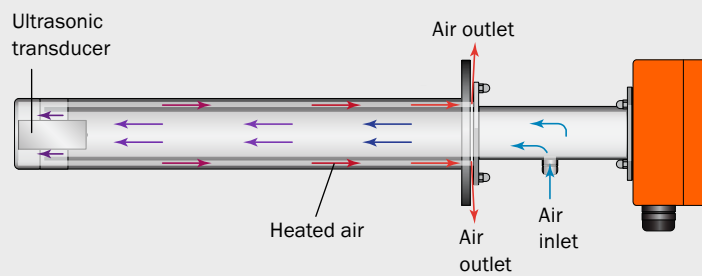

8011135/2012.03 - Subject to change without notice

Technical data	FLWSIC100 for continuous emission monitoring				
Device model	H	M	PR	H-AC	M-AC
Measuring parameters					
Measuring principle	Ultrasonic transit time measurement				
Measuring values	Gas velocity, volume flow (actual condition), volume flow (standard condition), gas temperature, speed of sound				
Measuring range	0 ... ± 40 m/s				
Accuracy	± 0.1 m/s				
Inner stack diameter	1.4 ... 13 m	0.15 ... 3.4 m	>0.4 m	1.4 ... 10 m	0.15 ... 3.4 m
Measurement conditions					
Meas. gas temperature	-40 ... +260 °C			-40 ... +450 °C	
Max. inner duct pressure	± 100 hPa				
Ambient conditions					
Ambient temperature	-40 ... +60 °C -40 ... +45 °C for MCU-P control unit (with running blower)				
Approval					
Conformities	2001/80/EC, 2000/76/EC, 27 th BImSchV, TA air, MCERTS, GOST				
Protection class	<ul style="list-style-type: none"> • IP65 • IP54 for MCU-P (control unit with integrated blower unit) 				
Electrical safety	CE				
Inputs, outputs, controls via MCU control unit					
Analog outputs	1 output: 0/2/4 ... 22 mA, max. load 750 Ω Optional: additional analog outputs when using I/O modules				
Analog inputs	2 inputs: 0 ... 5/10 V or 0 ... 20 mA, Optional: additional analog inputs when using I/O modules				
Digital outputs	5 outputs: 30 V DC/2 A, 48 V AC/1 A; floating Status signals: operation/malfunction, maintenance, check cycle, limit value, maintenance request Optional: additional digital outputs when using I/O modules				
Digital inputs	4 inputs for connection of floating contacts Optional: additional digital inputs when using I/O modules				
Interfaces	<ul style="list-style-type: none"> • USB • RS232 (service) 				
Bus protocol	<ul style="list-style-type: none"> • TCP/IP via ethernet (optional interface module) • PROFIBUS DP via RS485 (optional interface module) • MODBUS via RS485 (optional interface module) 				
General					
System components	<ul style="list-style-type: none"> • Sender/receiver unit(s) FLSE100 • MCU control unit • Connection box 		<ul style="list-style-type: none"> • Connection cables • Flanges with tube 		
Operation	Via display on the MCU control unit or SOPAS ET software				
Check function	Internal check cycle for zero-point and span check				
Mounting (typ. angle)	45° ... 60°		45° (PR type)	45° ... 60°	