


ARISTAIPC


ARP-3821AX

Unlimited Possibilities




Machine Top Pendant Arm



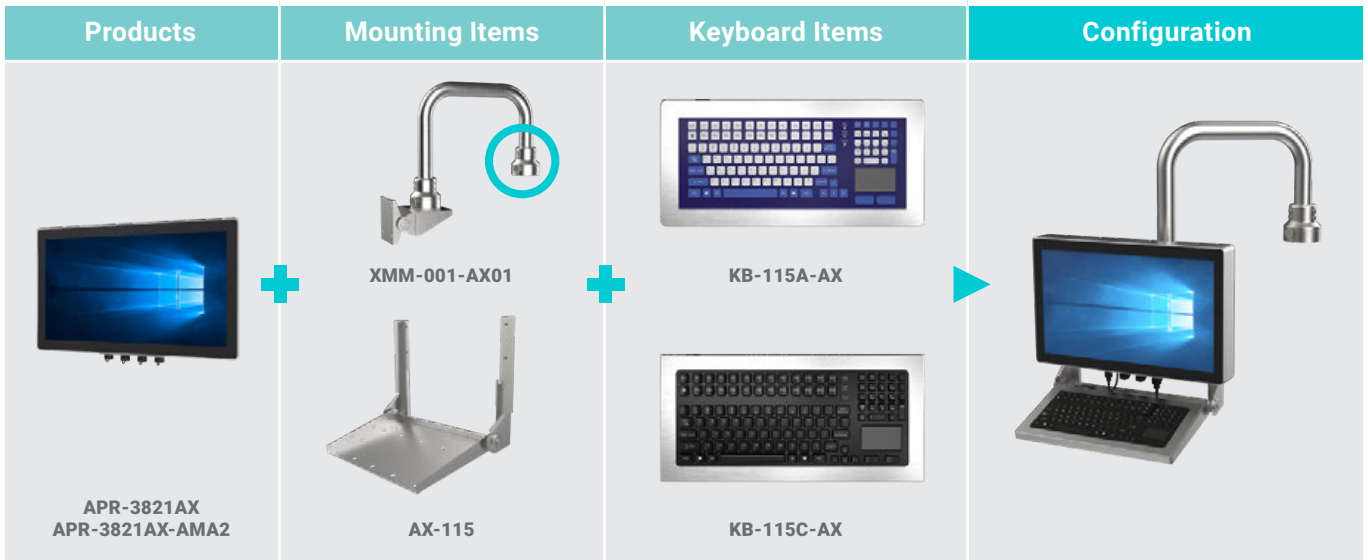


Dimensional Drawing

Size Unit: inch(mm)

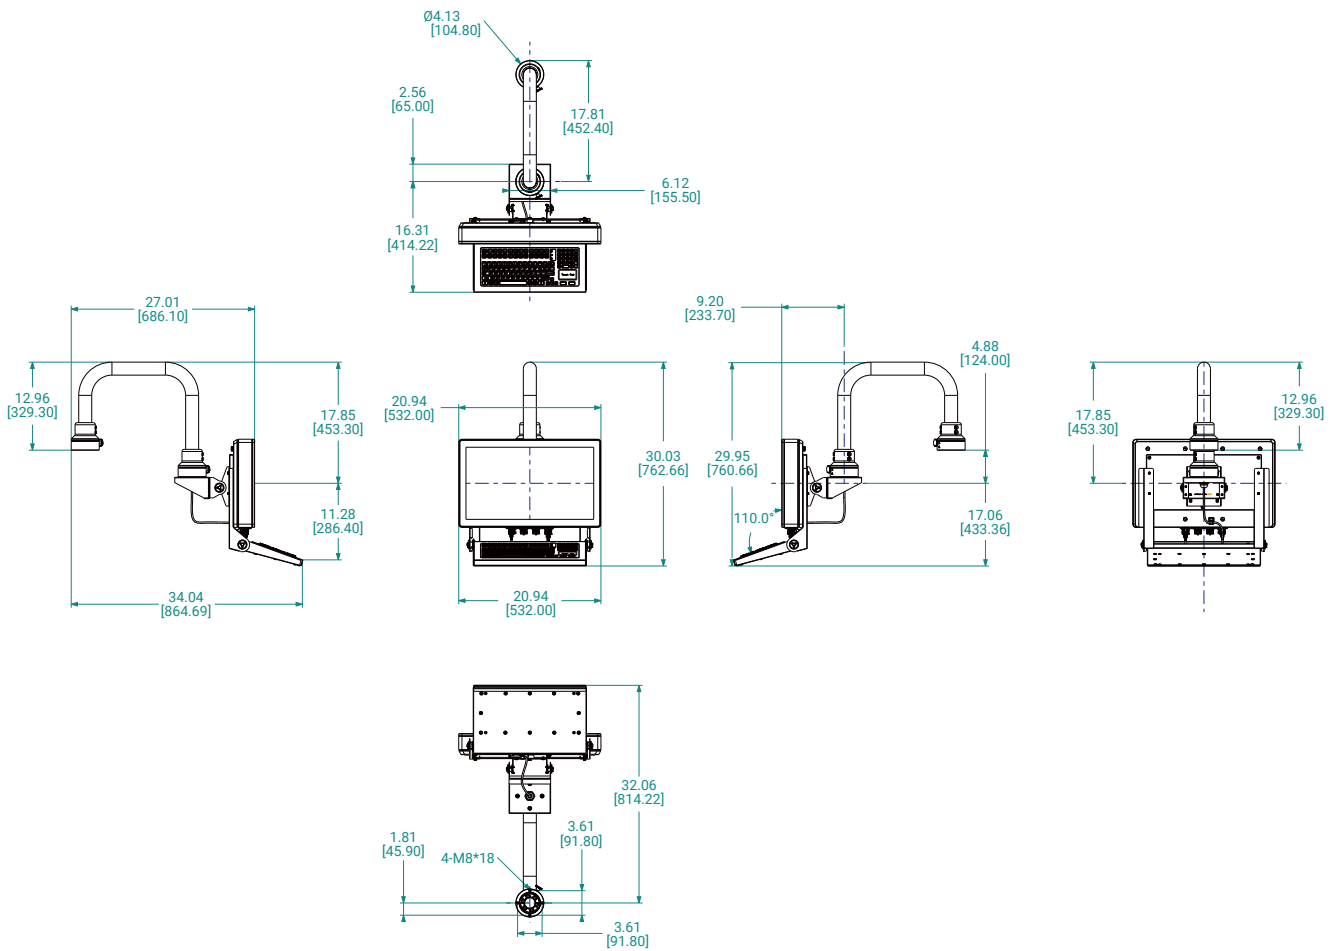


Wall Mount Pendant Arm



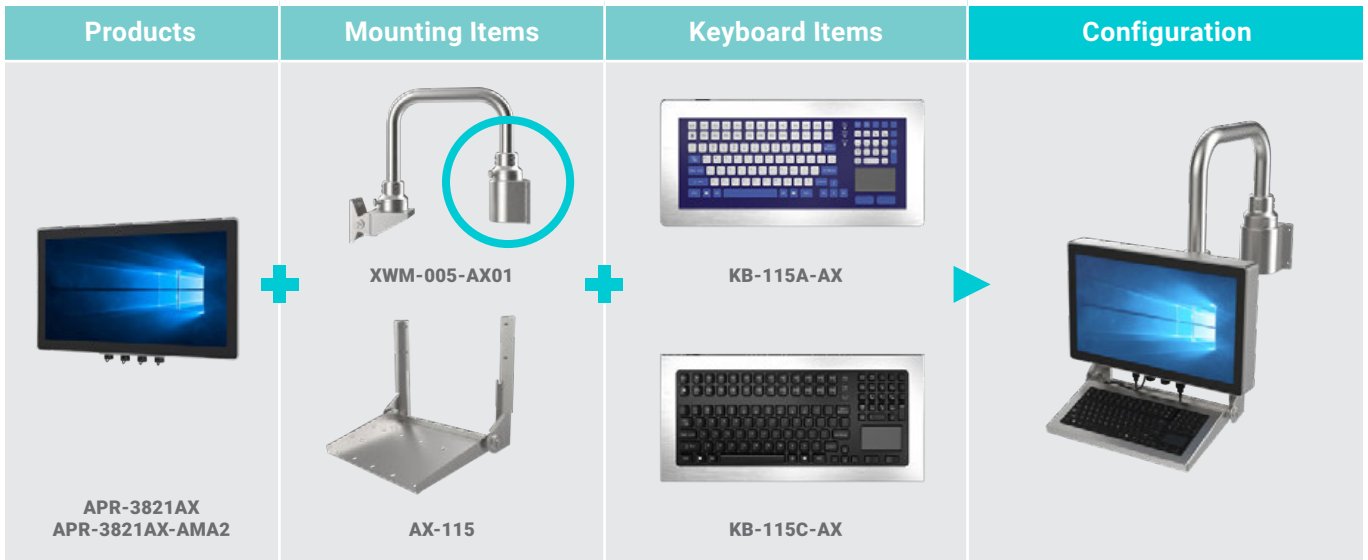


Dimensional Drawing

Size Unit: inch(mm)

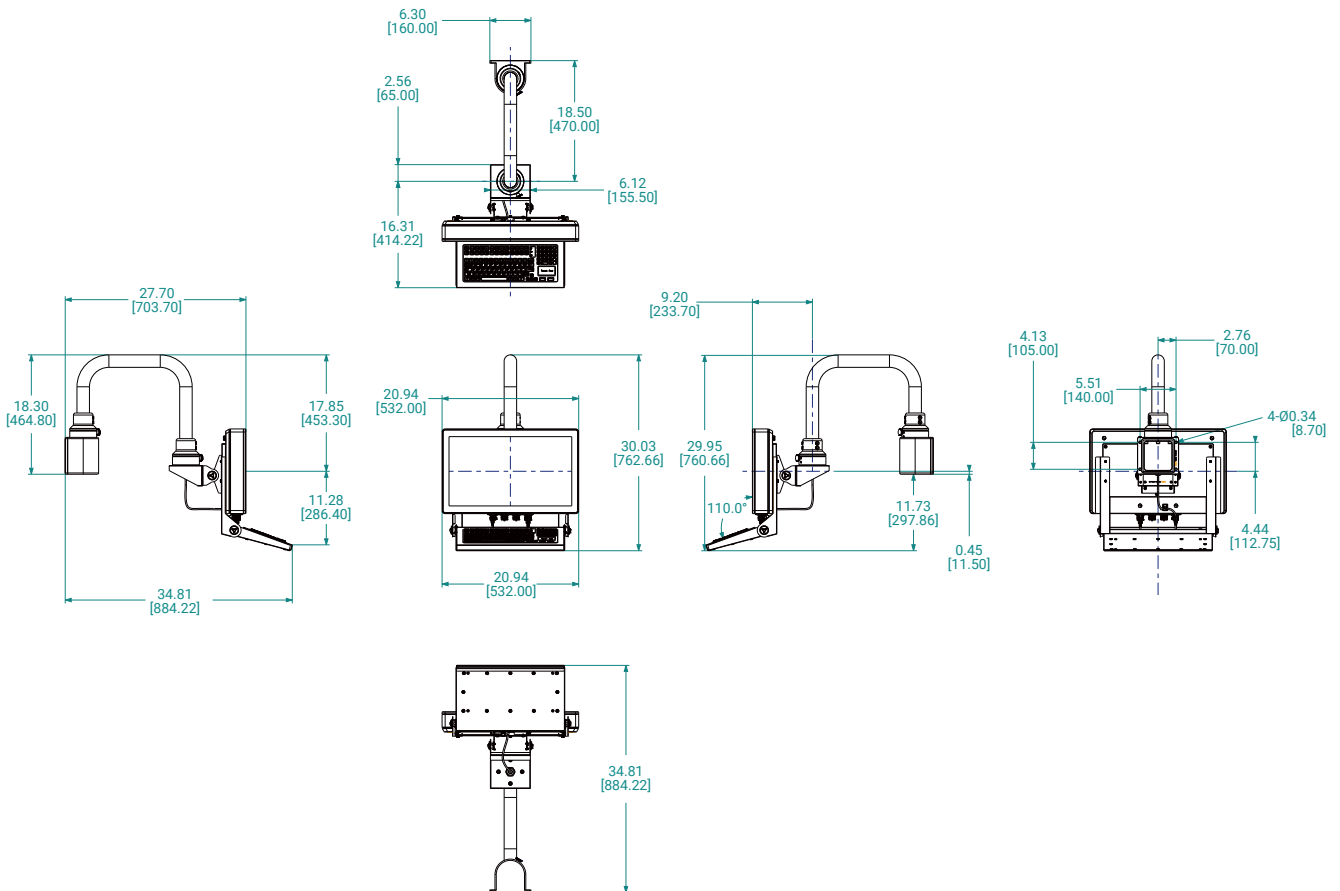


Wall Mount Foldable Keyboard



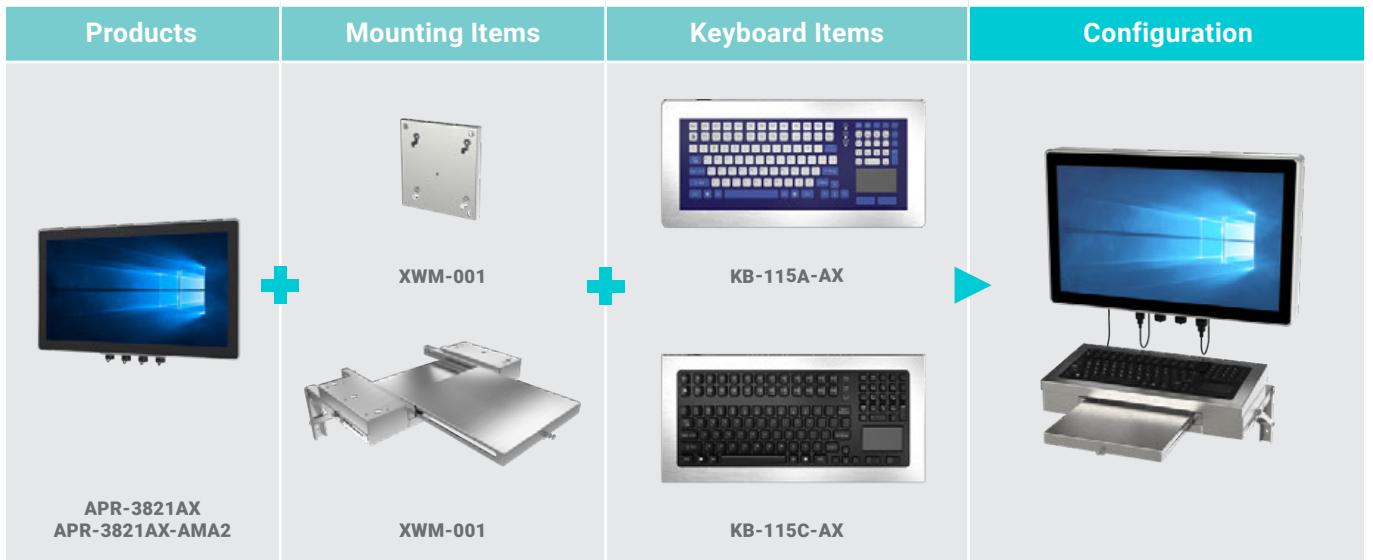






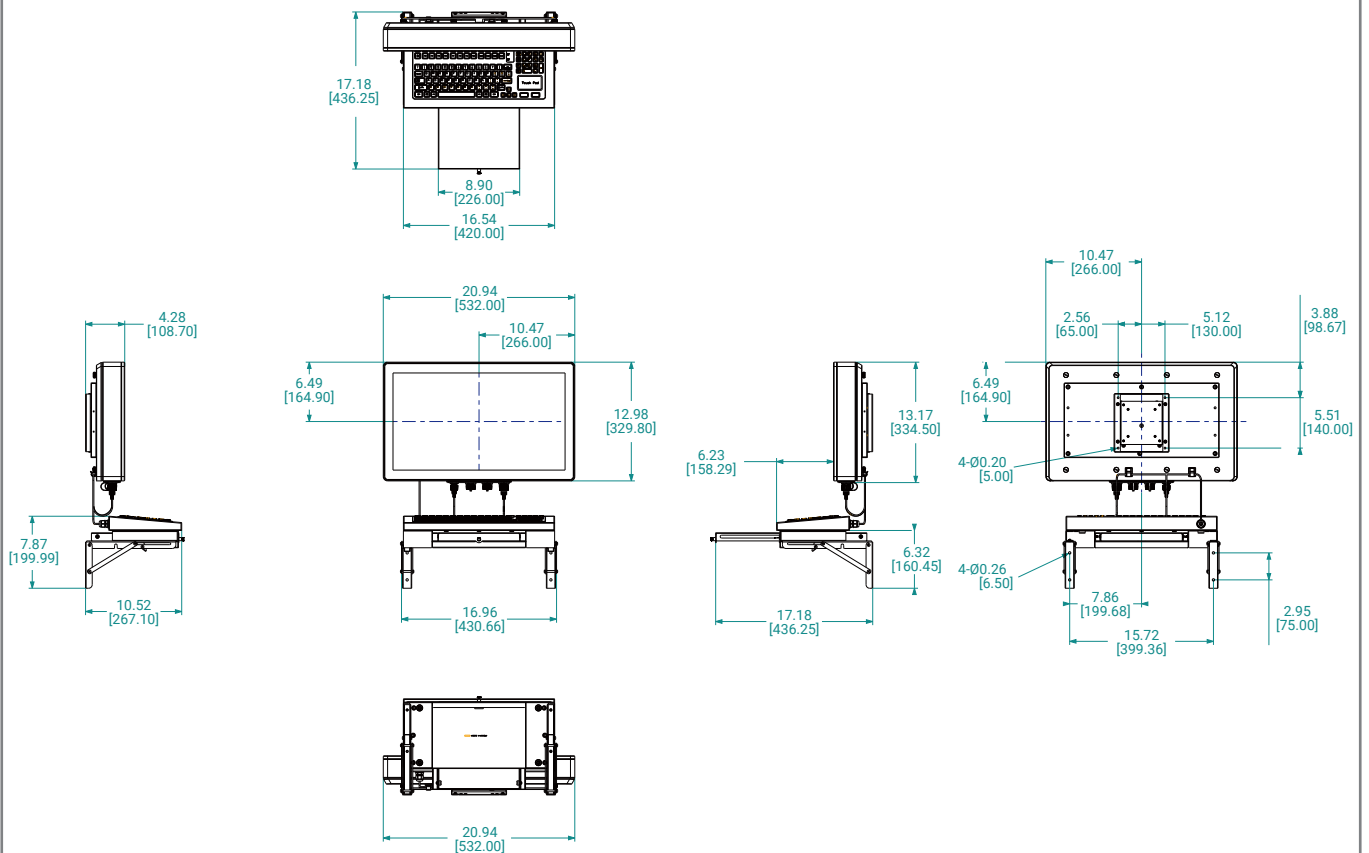

Dimensional Drawing

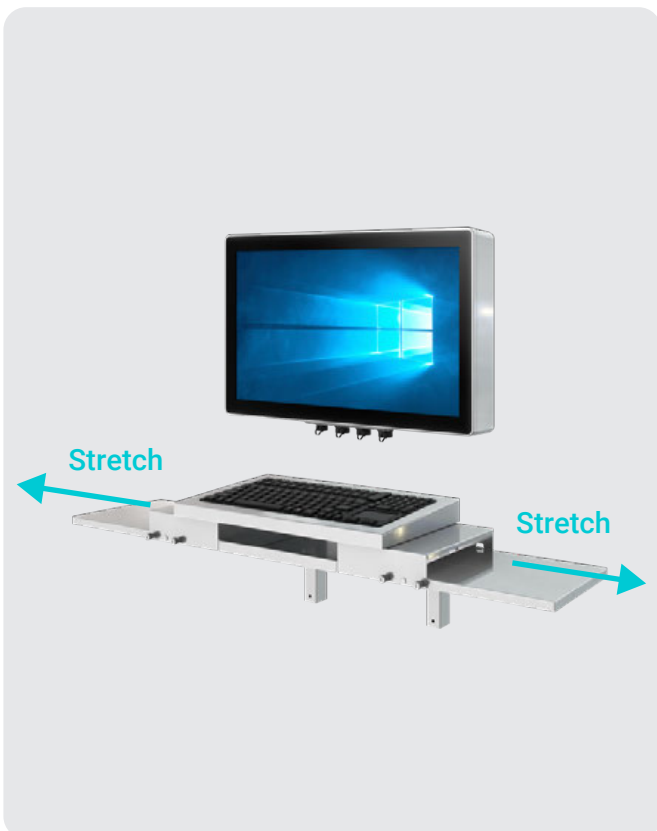Size Unit: inch(mm)




Wall Mount



Products	Mounting Items	Keyboard Items	Configuration
 <p>APR-3821AX APR-3821AX-AMA2</p>	 <p>XWM-001</p>  <p>XWM-KB-115-01</p>	 <p>KB-115A-AX</p>  <p>KB-115C-AX</p>	


Dimensional Drawing

Size Unit: inch(mm)

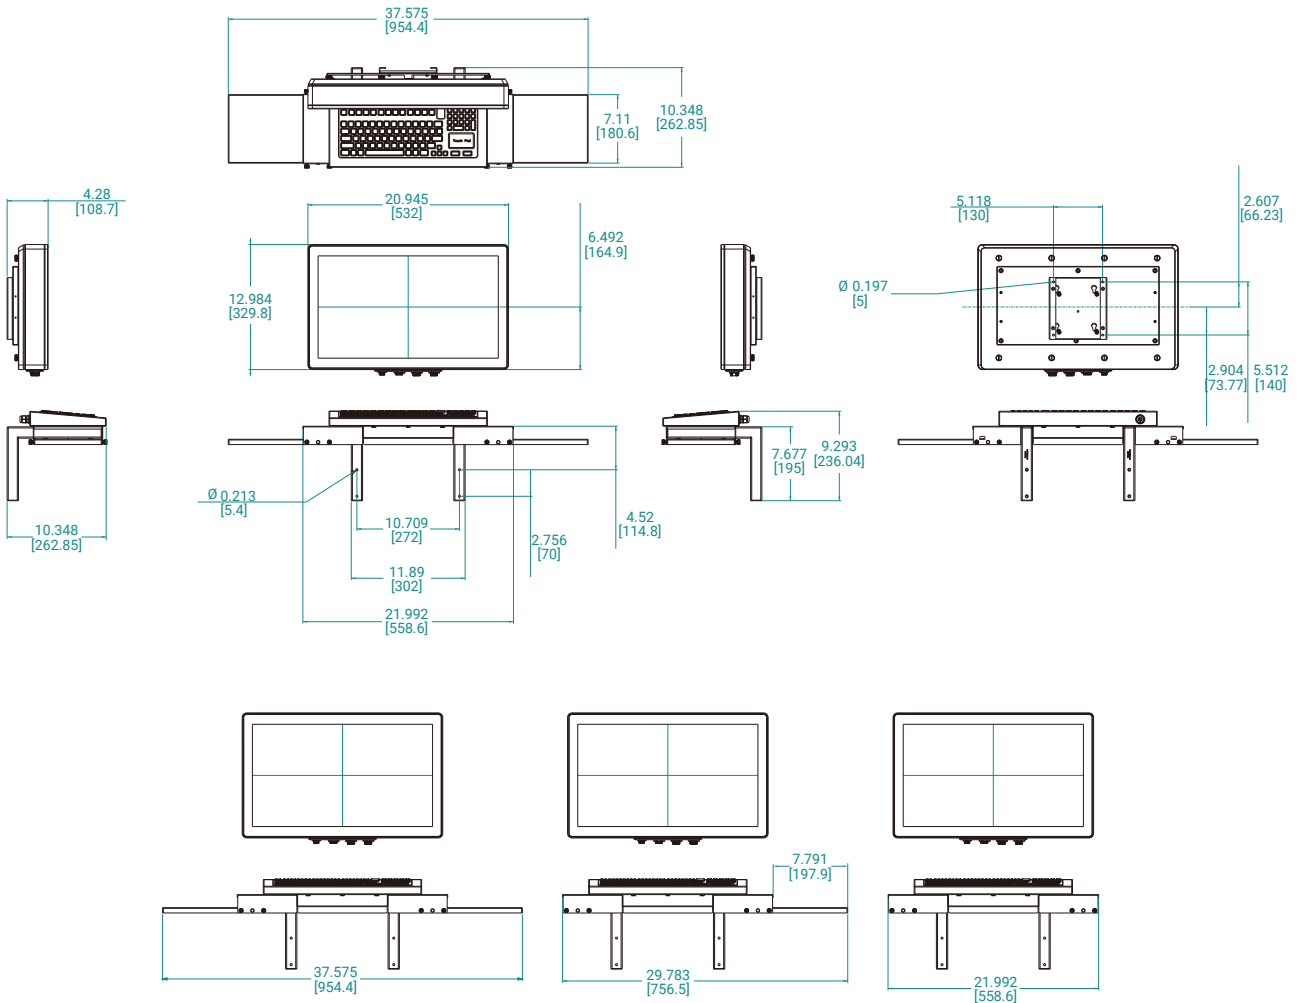


Wall Mount Adjustable Height



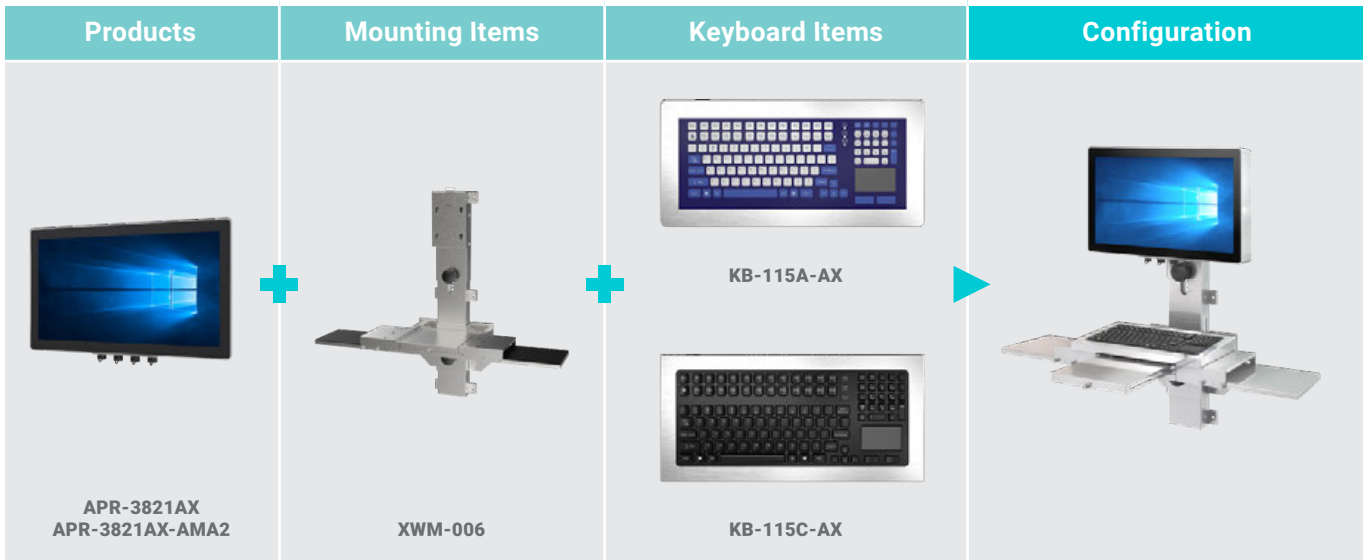


Dimensional Drawing

Size Unit: inch(mm)

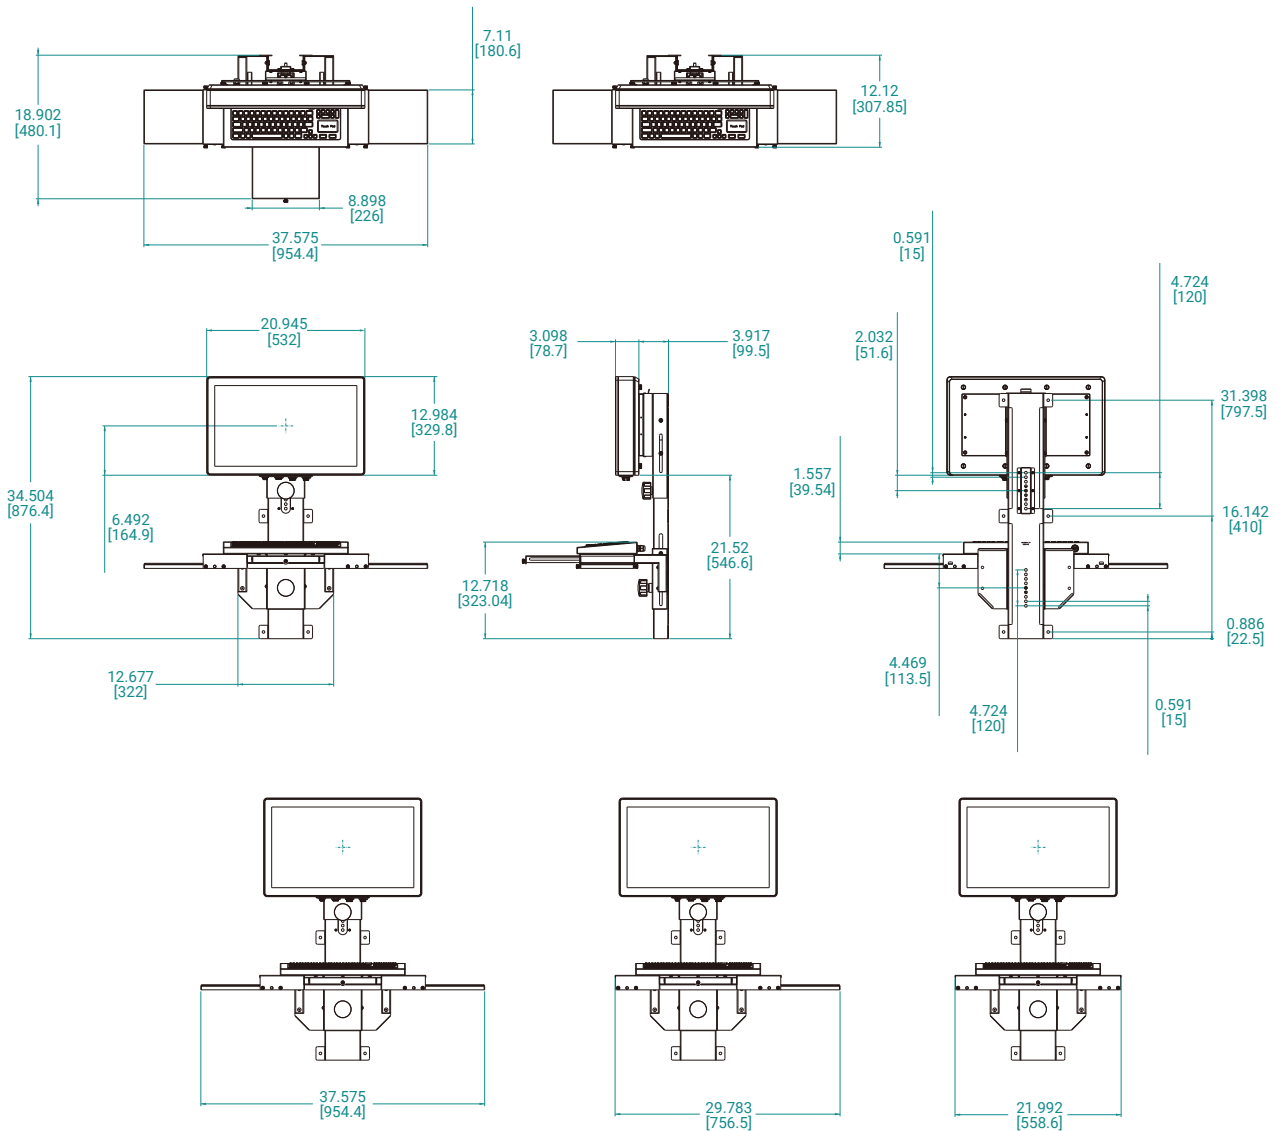


Pedestal Mount



Products	Mounting Items	Mounting Items	Configuration
 APR-3821AX APR-3821AX-AMA2	 XTM-001	 XTM-003	




Dimensional Drawing

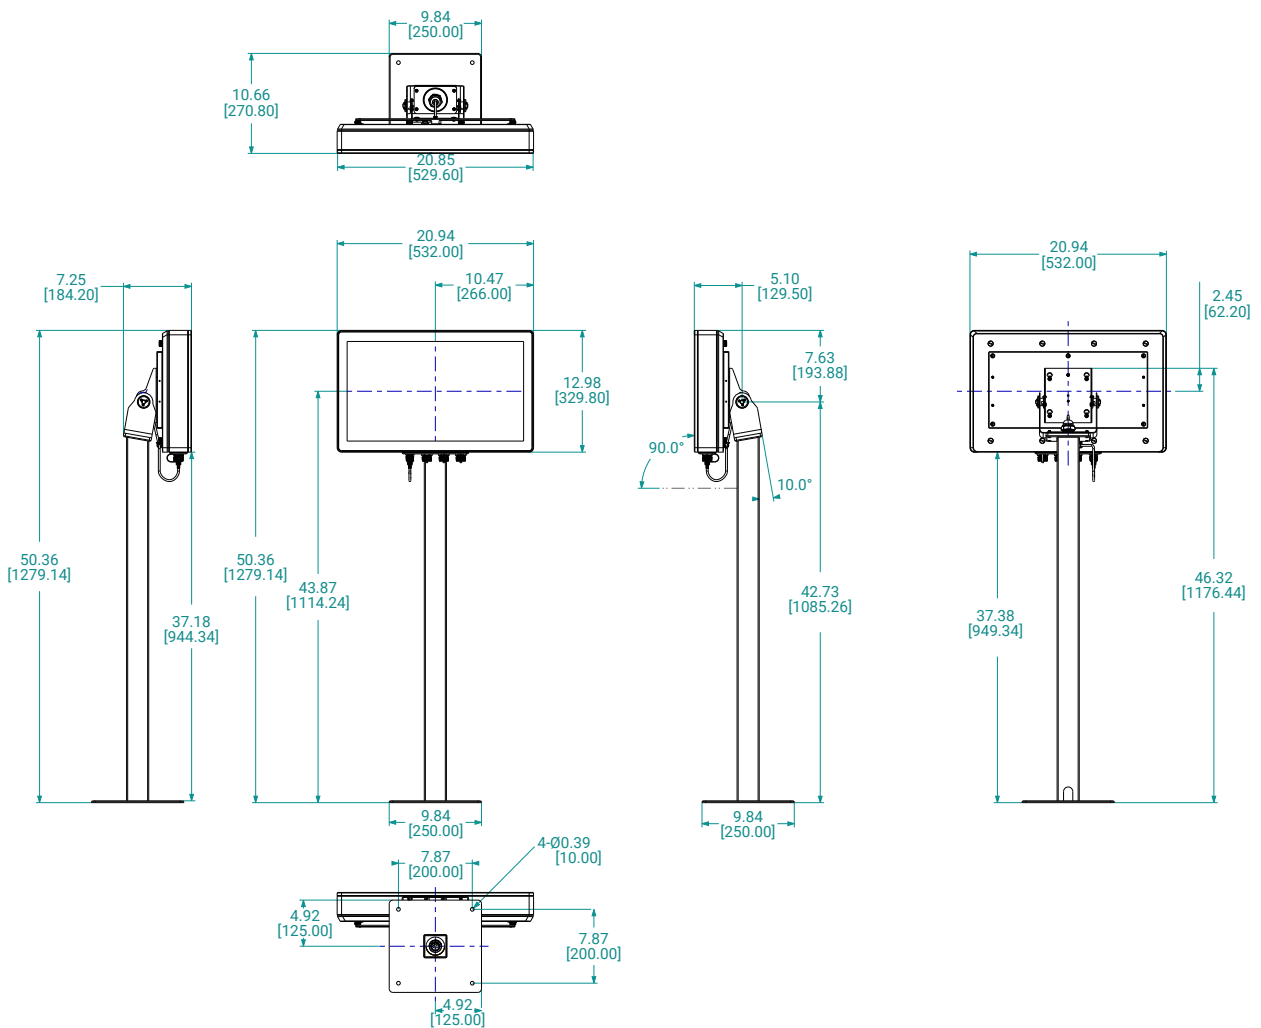Size Unit: inch(mm)




Benchtop



Products	Mounting Items	Configuration
 <p>APR-3821AX APR-3821AX-AMA2</p>	 <p>XDS-000</p>	

Dimensional Drawing

Size Unit: inch(mm)

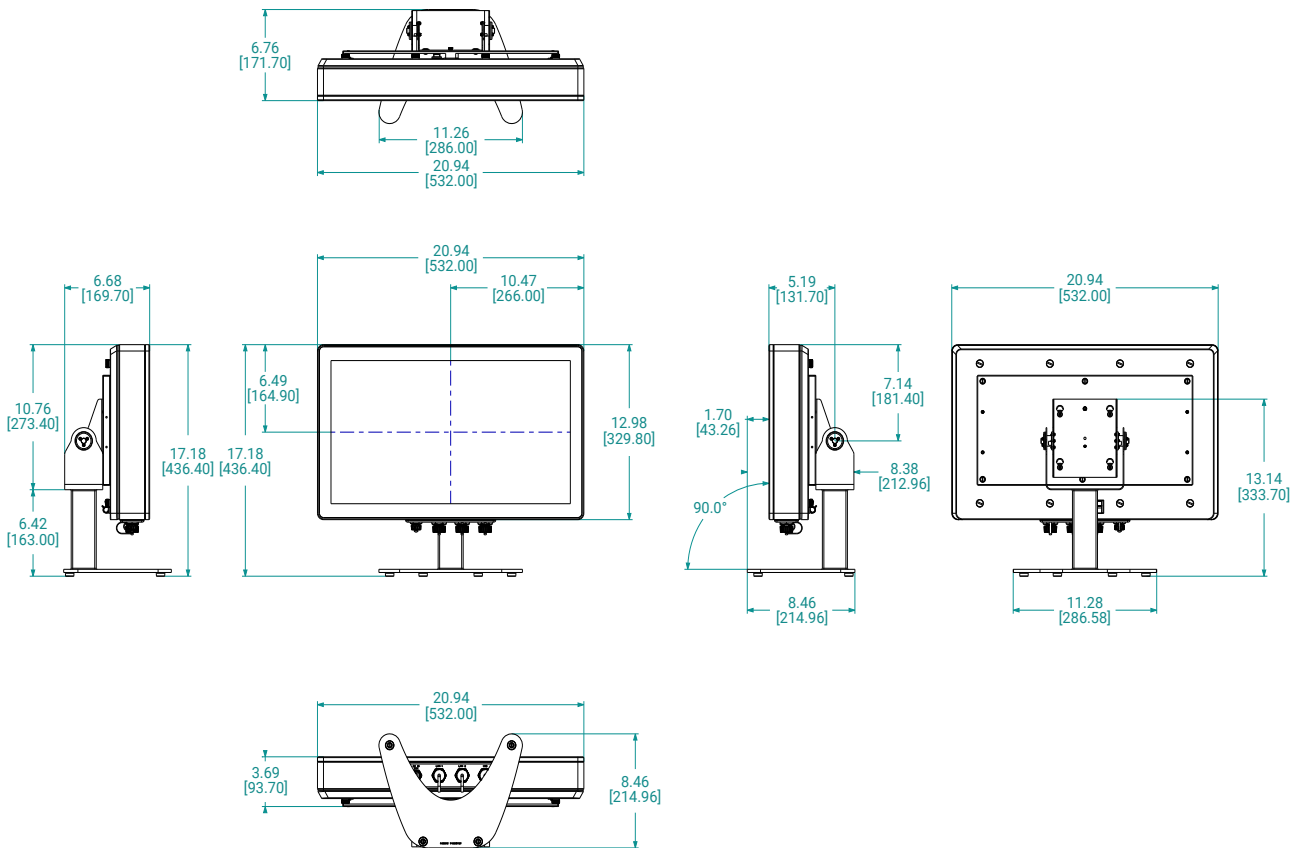

Windows OS

Odering Information	ARP-3821AX-H01-034-700	ARP-3821AX-AMA2-H01-034-700	ARP-3821AX-AMA2-H01-034-701
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive	Projected Capacitive
Enclosure	Stainless Steel	Stainless Steel	Stainless Steel
CPU	Intel 2.6/3.4 GHz i7-6600U	Intel 2.6/3.4 GHz i7-6600U	Intel 2.6/3.4 GHz i7-6600U
Memory	16GB DDR4	16GB DDR4	16GB DDR4
Storage	2.5" SSD	2.5" SSD	2.5" SSD
Remote Boot	N/A	N/A	N/A
Power Supply	24VDC INPUT	24VDC INPUT	24VDC INPUT
Scanner Holder	No	Yes	Yes
WIFI	No	No	Yes

Windows OS & Powered By PoE 802.3bt

Odering Information	ARP-3821AX-H01-A34-700	ARP-3821AX-AMA-H01-A34-700	ARP-3821AX-AMA-H01-A34-701
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive	Projected Capacitive
Enclosure	Stainless Steel	Stainless Steel	Stainless Steel
CPU	Intel 2.6/3.4 GHz i7-6600U	Intel 2.6/3.4 GHz i7-6600U	Intel 2.6/3.4 GHz i7-6600U
Memory	16GB DDR4	16GB DDR4	16GB DDR4
Storage	2.5" SSD	2.5" SSD	2.5" SSD
Remote Boot	N/A	N/A	N/A
Power Supply	Powered by PoE 802.3bt PD	Powered by PoE 802.3bt PD	Powered by PoE 802.3bt PD
Scanner Holder	No	Yes	Yes
WIFI	No	No	Yes

ThinManager Ready Thin Client

Odering Information	ARP-3821AX-E01-006	ARP-3821AX-AMA2-E01-006
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Enclosure	Stainless Steel	Stainless Steel
CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU
Memory	4GB DDR3	4GB DDR3
Storage	N/A	N/A
Remote Boot	ThinManager Ready	ThinManager Ready
Power Supply	24VDC INPUT	24VDC INPUT
Scanner Holder	No	Yes
WIFI	No	No

ThinManager Ready Thin Client & Powered By PoE 802.3bt

Odering Information	ARP-3821AX-E01-A06	ARP-3821AX-AMA2-E01-A06
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Enclosure	Stainless Steel	Stainless Steel
CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU
Memory	4GB DDR3	4GB DDR3
Storage	N/A	N/A
Remote Boot	ThinManager Ready	ThinManager Ready
Power Supply	Powered by PoE 802.3bt PD	Powered by PoE 802.3bt PD
Scanner Holder	No	Yes
WIFI	No	No

Windows OS for Class1 Div2 Hazardous Locations

Odering Information	ARP-3821AX-H01-094-700-C1D2	ARP-3821AX-AMA2-H01-094-700-C1D2
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Enclosure	Stainless Steel	Stainless Steel
CPU	Intel 2.6/3.4 GHz i7-6600U	Intel 2.6/3.4 GHz i7-6600U
Memory	16GB DDR4	16GB DDR4
Storage	512GB 2.5" SATA SSD	512GB 2.5" SATA SSD
Remote Boot	N/A	N/A
Power Supply	24VDC INPUT	24VDC INPUT
C1D2 Approval	Yes	Yes
Scanner Holder	No	Yes
WIFI	No	No

ThinManager Ready Thin Client for Class1 Div2 Hazardous Locations

Odering Information	ARP-3821AX-E01-006-C1D2	ARP-3821AX-AMA2-E01-006-C1D2
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Enclosure	Stainless Steel	Stainless Steel
CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU
Memory	4GB DDR3	4GB DDR3
Storage	N/A	N/A
Remote Boot	ThinManager Ready	ThinManager Ready
Power Supply	24VDC Input	24VDC Input
C1D2 Approval	Yes	Yes
Scanner Holder	No	Yes
WIFI	No	No



ARP-3821AX-H01-034-700
ARP-3821AX-H01-A34-700
ARP-3821AX-E01-006
ARP-3821AX-E01-A06



ARP-3821AX-AMA2-H01-034-700 (Barcode Scanner Holder)
ARP-3821AX-AMA2-H01-A34-700 (Barcode Scanner Holder)
ARP-3821AX-AMA2-E01-006 (Barcode Scanner Holder)
ARP-3821AX-AMA2-E01-A06 (Barcode Scanner Holder)



ARP-3821AX-AMA2-H01-034-701 (Barcode Scanner, WIFI)
ARP-3821AX-AMA2-H01-A34-701



ARP-3821AX-H01-094-700-C1D2
ARP-3821AX-E01-006-C1D2



ARP-3821AX-AMA2-H01-094-700-C1D2 (Barcode Scanner Only)
ARP-3821AX-AMA2-E01-006-C1D2 (Barcode Scanner Only)



ARISTA Corporation (USA)

🏠 48460 Lakeview Blvd, Fremont, CA 94538

☎ Phone : +1-510-226-1800 📠 eFax : 510-405-8437

✉ sales@goarista.com 🔗 www.aristaipc.com